

RF TEST ENCLOSURE

RT-2122

DATA SHEET



1. Main features

The RT-2122 supports broad band testing frequency and provides optimal testing circumstance to test mobile devices.

- Ultra-low cost product
- Simple structure
- Convenient use and maintenance
- Provides 3x basic I/O interface
- High performance RF absorber
- Changeable lid open angle using Torque Hinge

2. Product Specification

	W (mm)	D (mm)	H (mm)
Outer Size (Closed)	245	341	249 (157 Without legs)
Outer Size (Opened)	245	435	419 (327 Without legs)
Inner Size	160	200	92
Weight	Approx. 5.5kgf		
Packing Size	315	460	330
Packing Weight	Approx. 7.5kgf		
Interface	N-SMA	D.C	USB A-Micro 5p (or DB9 Filter)


Shielding effectiveness

Frequency – Unit : MHz	Shielding effectiveness – Unit : dB
100-3000	> 50
3000-6000	> 45


The shielding effectiveness in the above is measured when the blank I/O panel is attached.

3. Dimensions

Outside Dimensions

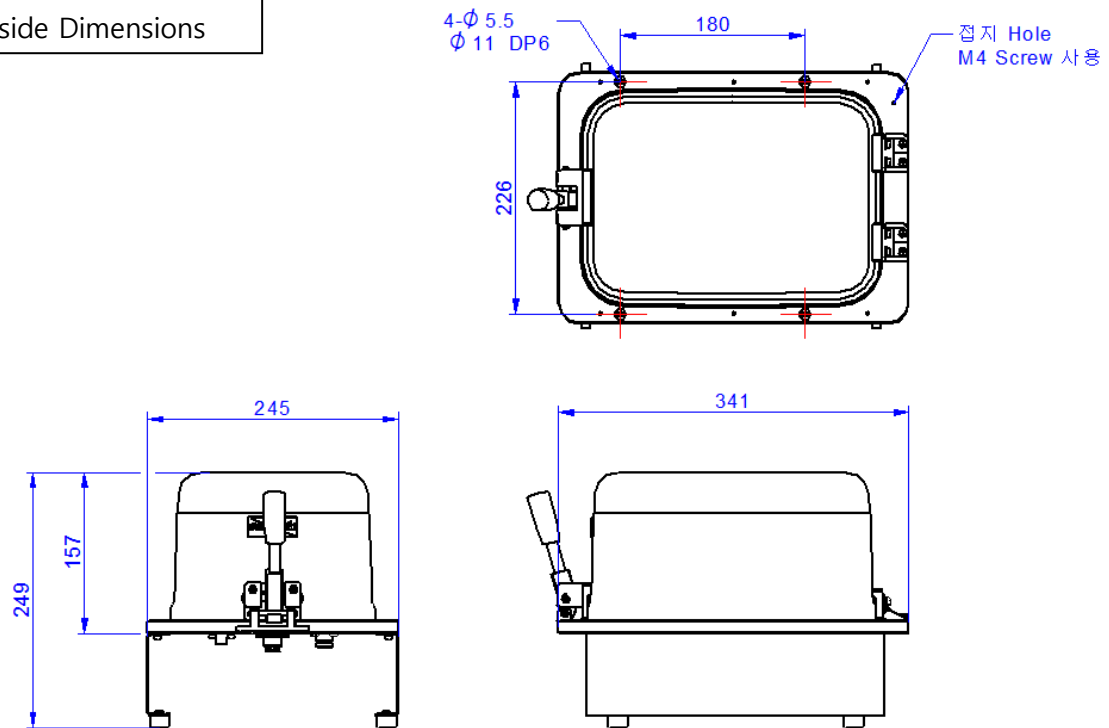

Inside Dimensions

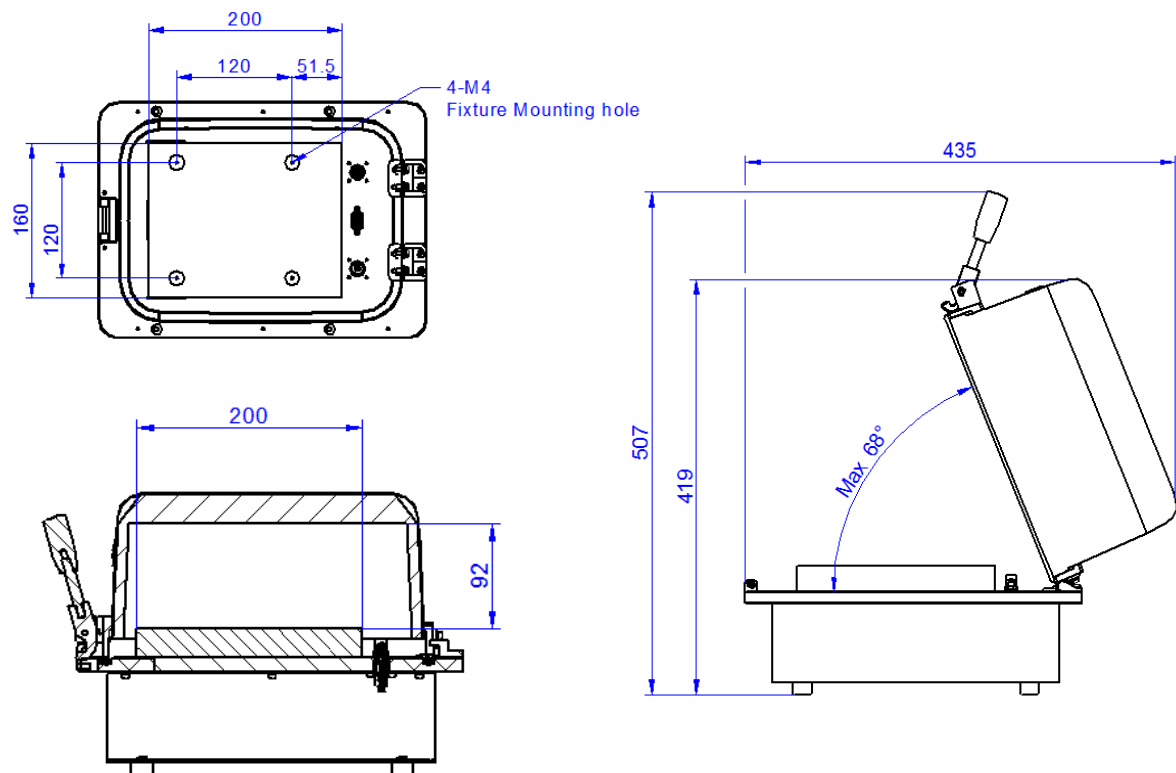

Roottek.co.kr

TEL: +82-70-5138-0370

FAX : +82-31-927-9201

e-mail : roottek@roottek.co.kr

** Specification of chamber can be updated without prior notice **