


RF TEST ENCLOSURE

RT-3140

DATA SHEET

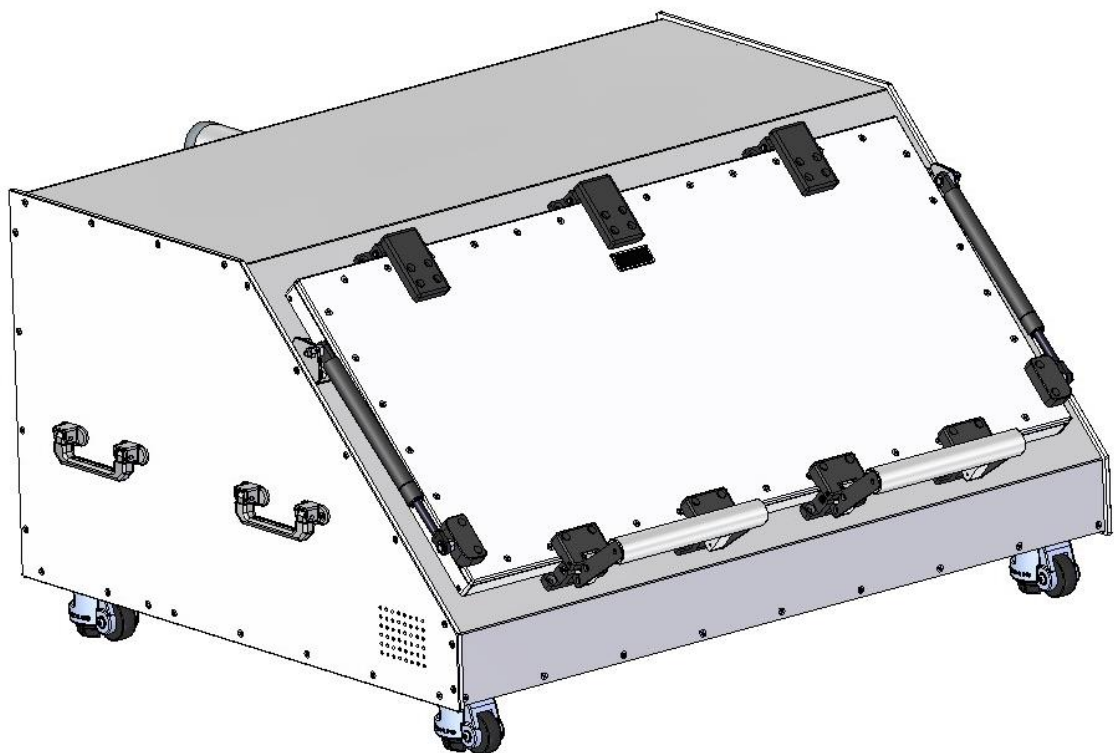

1. Main features

RT-3130 RF Test Enclosure supports broad band testing frequency and provides optimal testing condition to test mobile device.

- Outstanding durability
- Convenient use and maintenance.
- Supports 2x I/O interface panel (IA-series)
- High performance RF absorber on inside walls
- High shielding effectiveness using double layer gasket structure.
- Reliable test result and repeatability
- Fixture mounting holes in the top, bottom and side walls

2 . Product specification

	W (mm)	D (mm)	H (mm)
Outer Size (Closed)	954	801	493
Outer Size (Opened)	954	727	850
Inner Size	843	650	351
Weight	Approx. 35Kgf		
Packing Size	690	750	570
Packing Weight	Approx. 43Kgf		
Interface	I/O Panel : IA-Series		


Shielding effectiveness

Frequency – Unit : MHz	Shielding effectiveness – Unit : dB
100-3000	> 80
3000-6000	> 70


본 차폐효과의 결과 치는 blank I/O Panel 을 장착한 후 측정한 결과 입니다.

3. Dimensions

Outside Dimensions

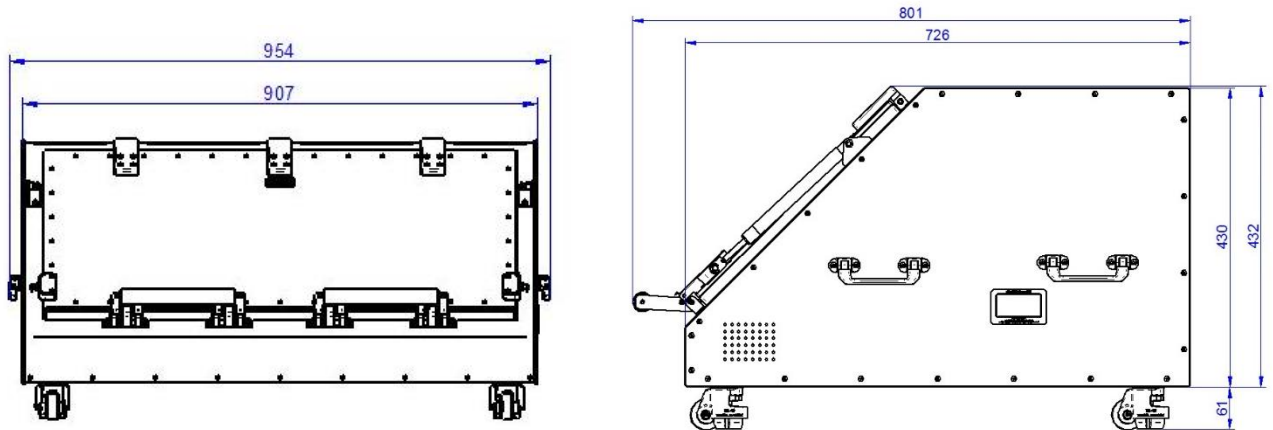


CLOSED

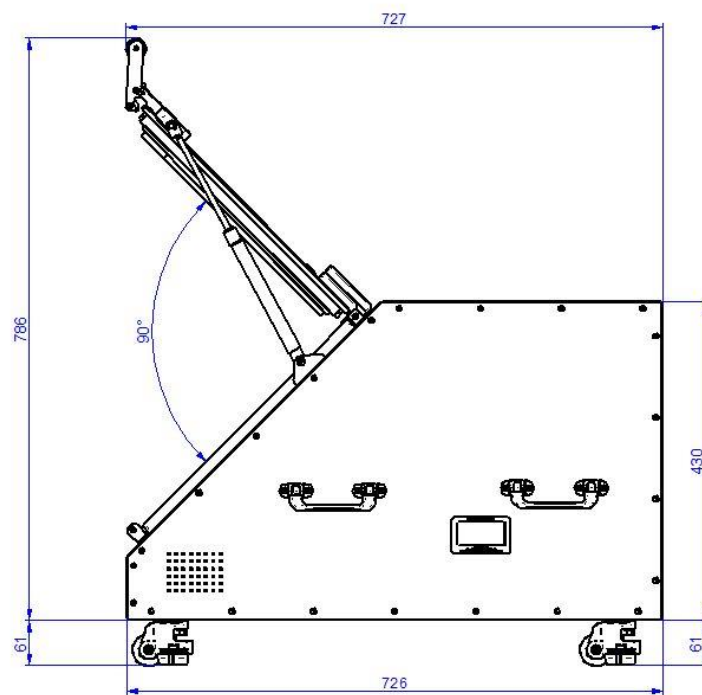

OPENED

Inside Dimensions

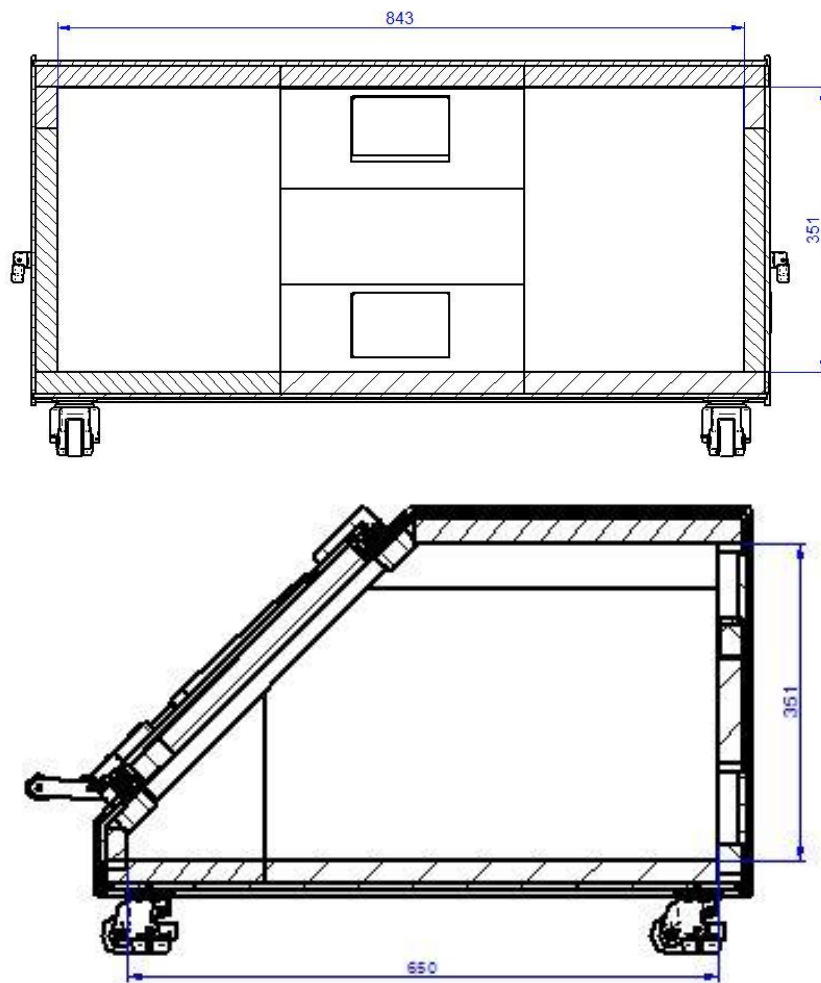

Roottek.co.kr

TEL: 070-5138-0370

FAX : 031-927-9201

e-mail : roottek@roottek.co.kr

** 본 DATA SHEET 는 당사의 사정에 따라 예고 없이 변경 될 수 있습니다 **