

RF TEST ENCLOSURE

RT-1331

DATA SHEET



1. Main features

RT-1331 RF Test Enclosure supports broad band testing frequency and provides optimal testing condition to test mobile device.

- Outstanding durability and simple structure.
- Convenient use and maintenance.
- Supports 2x I/O interface panel (IA-series)
- High performance RF layered absorber on inside walls
- High shielding effectiveness using double layer gasket structure.
- 19" Rack Mountable
- Fixture mounting holes in the top and side walls
- Support air ventilation with an externally mounted AC fan.

2 . Product specification

	W (mm)	D (mm)	H (mm)
Outer Size (Closed)	434	695	444
Outer Size (Opened)	555	1011	444
Inner Size	368	366	370
Weight	Approx. 30Kgf		
Packing Size	550	780	540
Packing Weight	Approx. 40Kgf		
Interface	I/O Panel : IA-Series		


Shielding effectiveness

Frequency – Unit : MHz	Shielding effectiveness – Unit : dB
100-3000	> 80
3000-6000	> 70


The shielding effectiveness in the above is measured when the blank I/O panel is attached.

3. Dimensions

Outside Dimensions

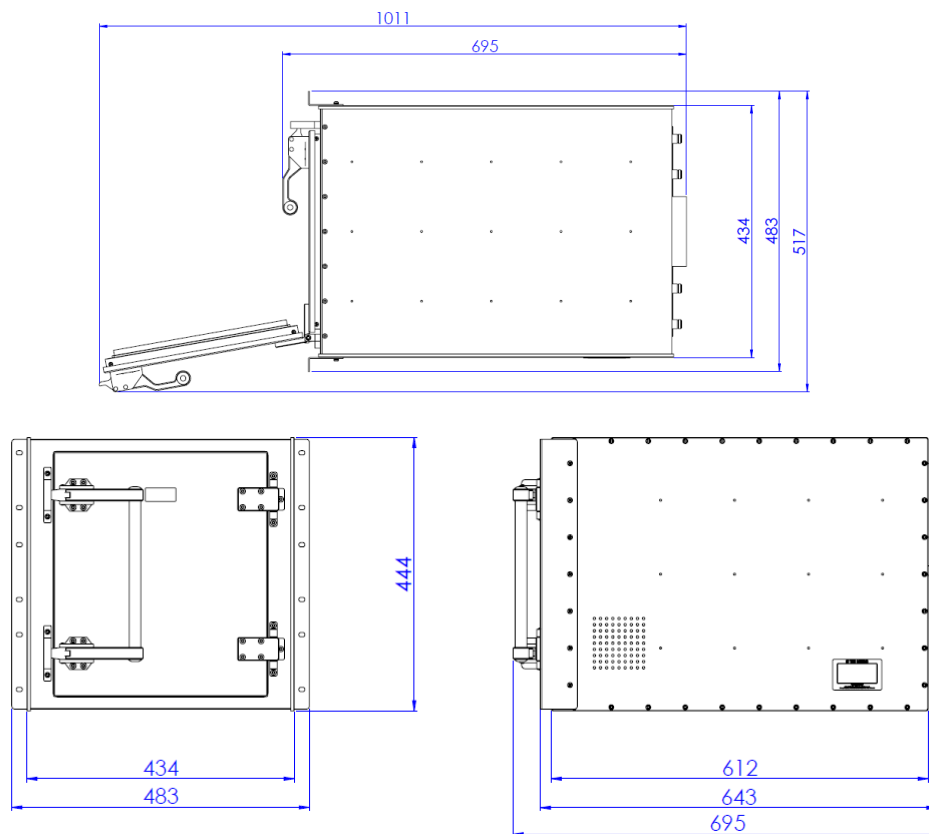

Inside Dimensions

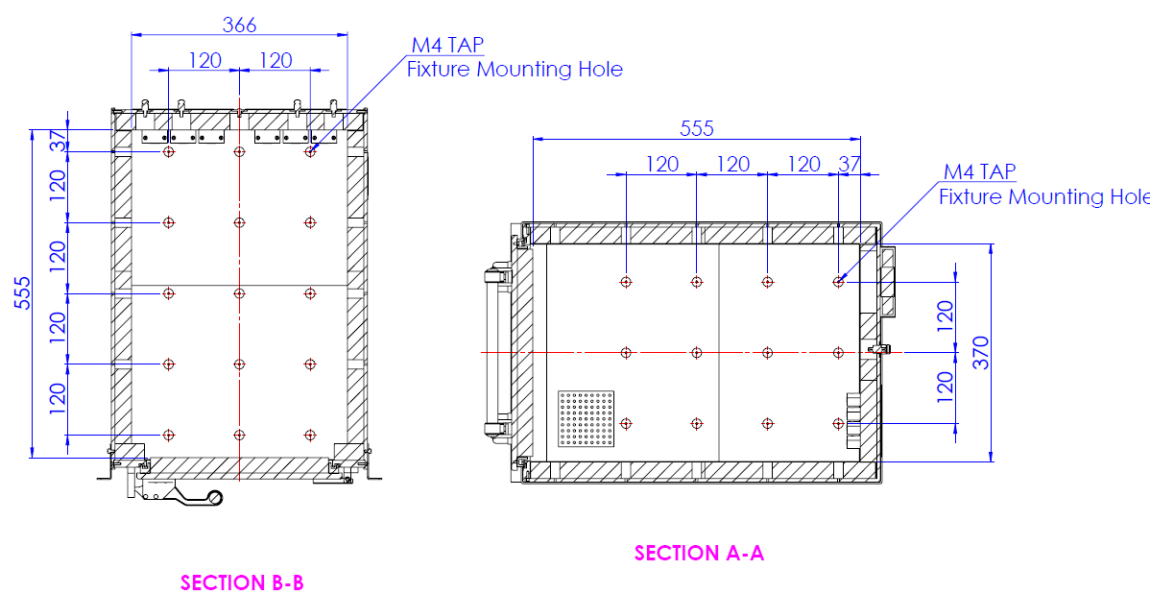

Roottek.co.kr

TEL: +82-70-5138-0370

FAX: +82-31-927-9201

e-mail: roottek@roottek.co.kr

** Specification of chamber can be updated without prior notice **